


Transport pneumatique phase diluée en aspiration ou Refoulement produits légers

Pneumatic Conveying (Diluted Concentration light Particles)
vacuum or Pressure systems

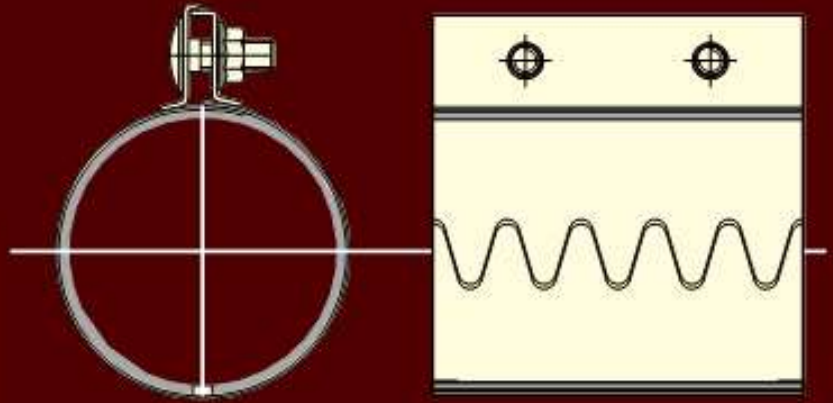

L	100 mm
r	38.1 <> 114.3 mm
Boulons bolts	M8
Serrage tightening	16 N.m

Description standard

- Enveloppe extérieure inox 430
- Joint SBR noir -30°C/+80°C
- Boulons zingués
- Lamelle de conductivité inox 304 L

Specification of Standard coupling

- outside skin in stainless steel 430
- black sbr gasket -30°C/+80°C
- Zinc plated bolts
- stainless steel 304 L, conductivity strip

Options

- Version tout inox 304L
- Joint Nitrile NBR blanc FDA -30°C/+110°C
- Joint Silicone VMQ -65°C/+225°C
- Joint Viton FPM noir -20°C/+250°C
- Raccord pont (voir p. 5)
- Raccord pour 2 diamètres différents (voir p. 5)
- Lamelle de conductivité cuivre CU Al
- Anneau protecteur conducteur inox 304L (voir p. 5)

options

- all stainless steel 304l version
- White Nitrile Nbr gasket fDa -30°C/+110°C
- silicone vmQ gasket -65°C/+225°C
- viton fPm gasket -20°C/+250°C
- Coupling with clamp and side bars (see p. 5)
- Coupling for two tubes with different diameters (see p. 5)
- Conductivity strip in copper CU al
- Conductive protecting ring in stainless steel 304l (see p. 5)

- Référence réglementaire - reference to regulation : **N°97/23/CE.G2 Art.3 §3**
- Exemple de marquage du produit - example of product marking : **D 54**




couRbes pRession maximum euRac I100

maximUm PressUre CURves for eURaC I100

Pression maximum de service tuyauterie libre
maximum working pressure with free-hanging pipes



Pression maximum de service tuyauterie bloquée
maximum working pressure with clamped pipes

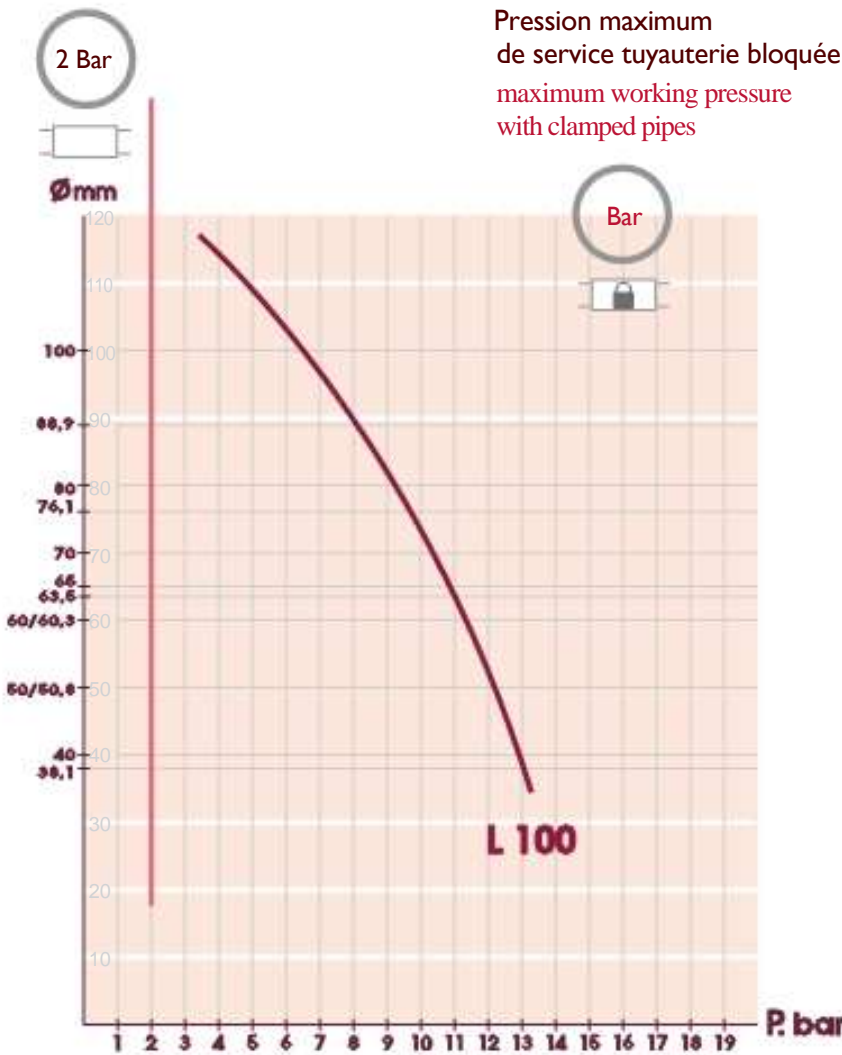

ř	L100
38,1	En stock - on stock
40	En stock - on stock
45	En stock - on stock
50/50,8	En stock - on stock
54	En stock - on stock
55	En stock - on stock
60/60,3	En stock - on stock
63,5	En stock - on stock
65	En stock - on stock
70	En stock - on stock
75	En stock - on stock
76,1	En stock - on stock
80	En stock - on stock
82	En stock - on stock
84	En stock - on stock
85	En stock - on stock
88,90	En stock - on stock
95	En stock - on stock
100	En stock - on stock
101,6	En stock - on stock
104	En stock - on stock
105	En stock - on stock
108	En stock - on stock
114,3	Sur commande - on order

options - oPtioNs

- Raccord pont
Coupling with clamp and side bars



- Anneau protecteur conductif inox 304L
Conductive protection ring in stainless steel 304L



- Raccord pour 2 diamčtres diffřrents
Coupling for two tubes with different diameters

