

NEW

EURAC[®]

Compression coupling





New Eurac HL

- Improved pressure resistance
- Lightweight
- More economical

STIF

sales@stifnet.com — www.stifnet.com

COMPRESSION COUPLING

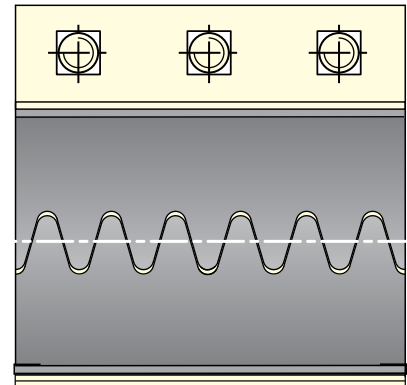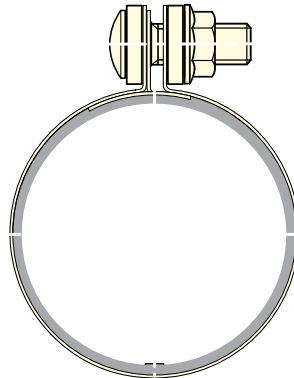

L	100 - 150 - 200 250 - 300 mm
∅	38,1 <> 219,1 mm
Bolts	M10 < 88,9 M12 ≥ 88,9
Tightening	M10: 47 N.m M12: 60 N.m

∅	L100	L150	L200	L250	L300
38,1					
40					
45					
48,3					
50/50,8					
54					
55					
60/60,3					
63,5					
65					
70					
75					
76,1					
80					
82					
84					
85					
88,9					
90					
95					
100					
101,6					
104					
105					
108					
114,3					
125					
127					
129					
133					
139,7					
145					
152,4					
154					
155					
159					
168,3					
219,1					

SPECIFICATION OF STANDARD COUPLING

- Outside skin in galvanised steel
- Gasket cover in galvanised steel
- White NBR gasket FDA -30°C/+110°C
- Zinc plated bolts
- Stainless steel 304 L, conductivity strip

OPTIONS

- All stainless steel 304L version
- Black rubber SBR gasket -30°C/+80°C
- Silicone VMQ gasket -65°C/+225°C
- Viton FPM gasket -20°C/+250°C
- Coupling with clamp and side bars
- Coupling for tubes with different diameters
- Conductivity strip in copper CU A1
- Conductive protection ring in stainless steel 304L

- Reference to regulation: **N°97/23/CE.G2 Art.3 §3**
- Example of product marking: **EURAC® HL D 88.9**

On stock
 On request

STIF

Z.A. de la Lande — 49170 Saint-Georges-sur-Loire — FRANCE

Tél.: +33 2 41 72 16 82 — Fax: +33 2 41 39 32 12 — E mail: sales@stifnet.com — Web: www.stifnet.com